
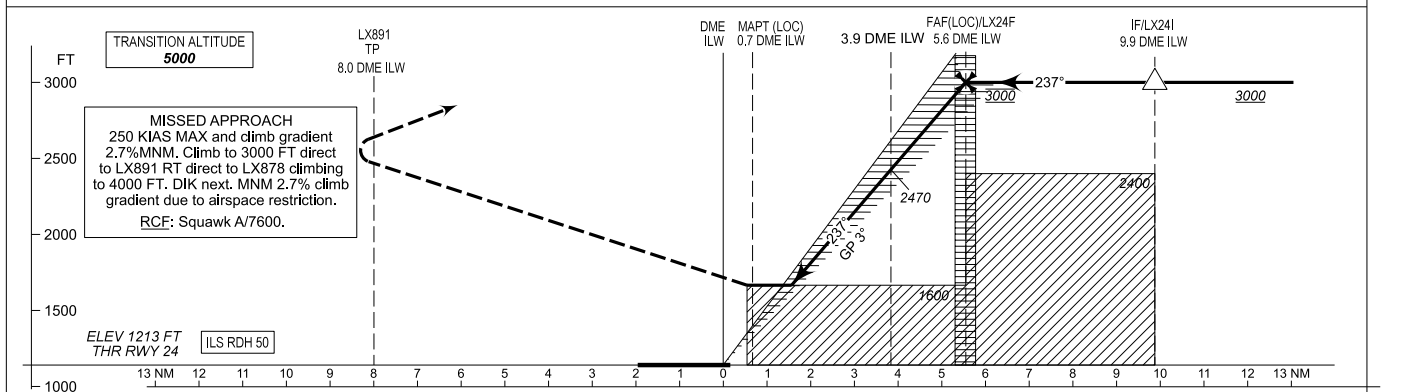


INSTRUMENT APPROACH CHART - ICAO

AD ELEV 1234
OCH RELATED TO
THR 24 ELEV 1213

LUXEMBOURG / Luxembourg (ELLX)
ILS CAT II & III or LOC z RWY 24

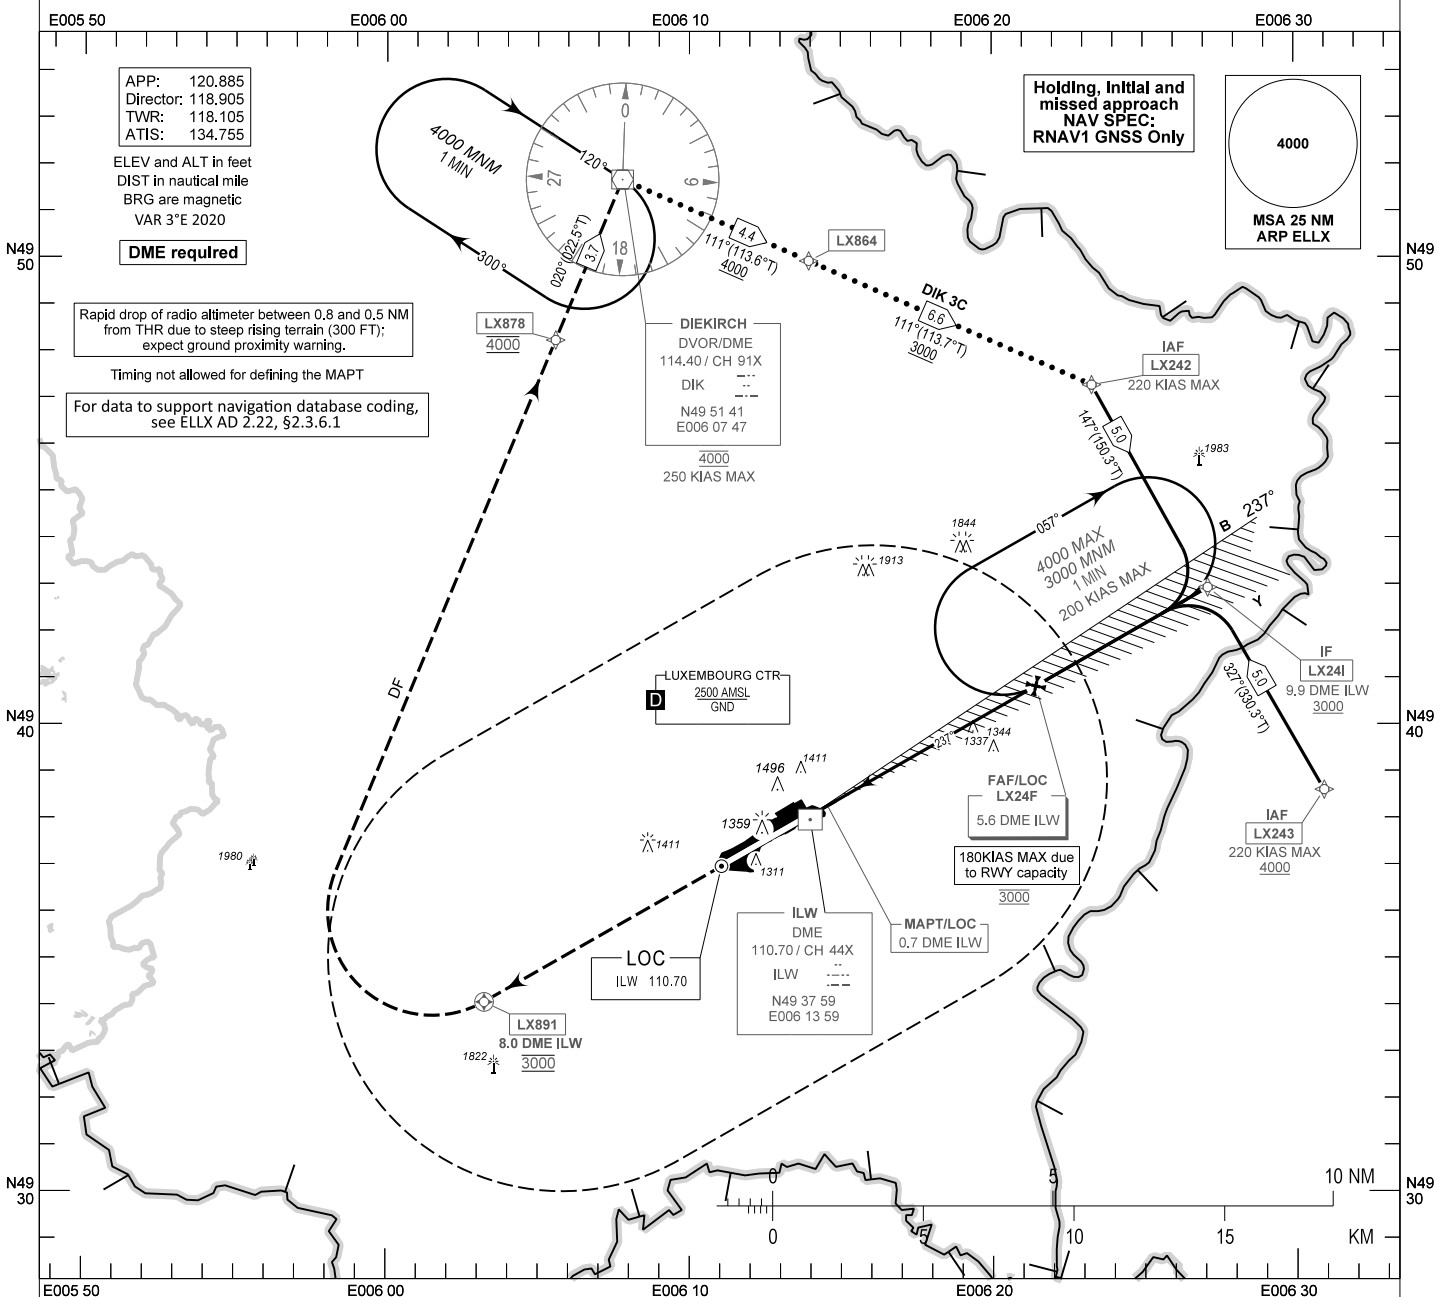

OCA (OCH)						FAF to MAPT - 4.9 NM						
CAT of ACFT	A	B	C	D	DL	Speed (GS)	KT	70	90	120	150	180
ILS CAT I	1413 (200)	1413 (200)	1413 (200)	1414 (201)	1417 (204)	Rate of descent	FT/MIN	375	480	640	800	960
ILS CAT II	1304 (91)	1307 (94)	1315 (102)	1330 (117)	1334 (121)	PROCEDURE ALTITUDES						
LOC	1600 (390)	1600 (390)	1600 (390)	1600 (390)	-							DIST ILW
MINIMA (RVR/VIS)						Altitude						
ILS CAT I	550 M RVR	550 M RVR	550 M RVR	550 M RVR	550 M RVR	2810	2490	2170	1850			
ILS CAT II	300 M RVR	300 M RVR	300 M RVR	300 M RVR	300 M RVR							
ILS CAT IIIA	200 M RVR	200 M RVR	200 M RVR	200 M RVR	200 M RVR							
ILS CAT IIIB	125 M RVR	125 M RVR	125 M RVR	125 M RVR	125 M RVR							
LOC	800 M	800 M	800 M	1200 M	1200 M							

CHANGE: RCF missed approach