
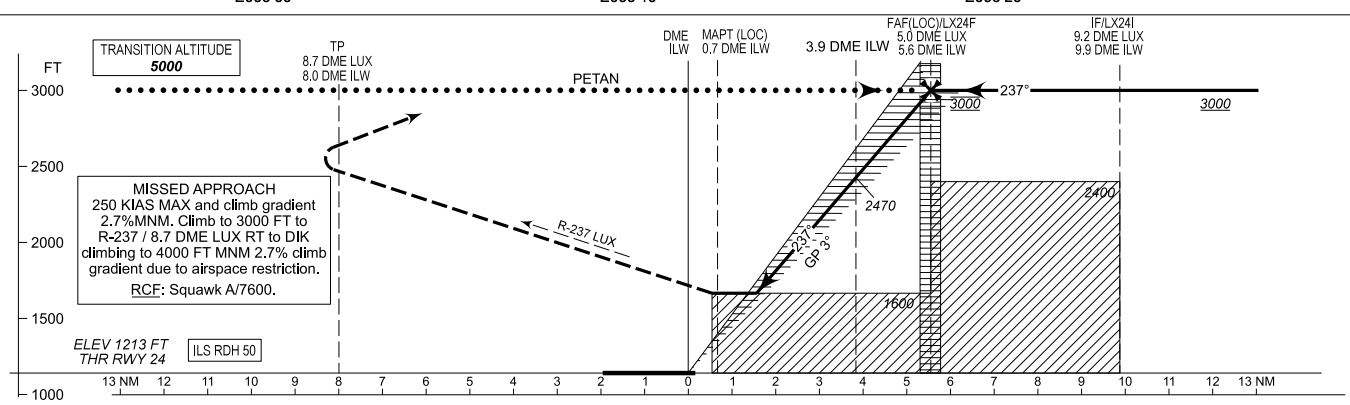


**INSTRUMENT APPROACH CHART - ICAO**

AD ELEV 1234  
OCH RELATED TO  
THR 24 ELEV 1213

**LUXEMBOURG / Luxembourg (ELLX)**  
ILS CAT II & III or LOC y RWY 24

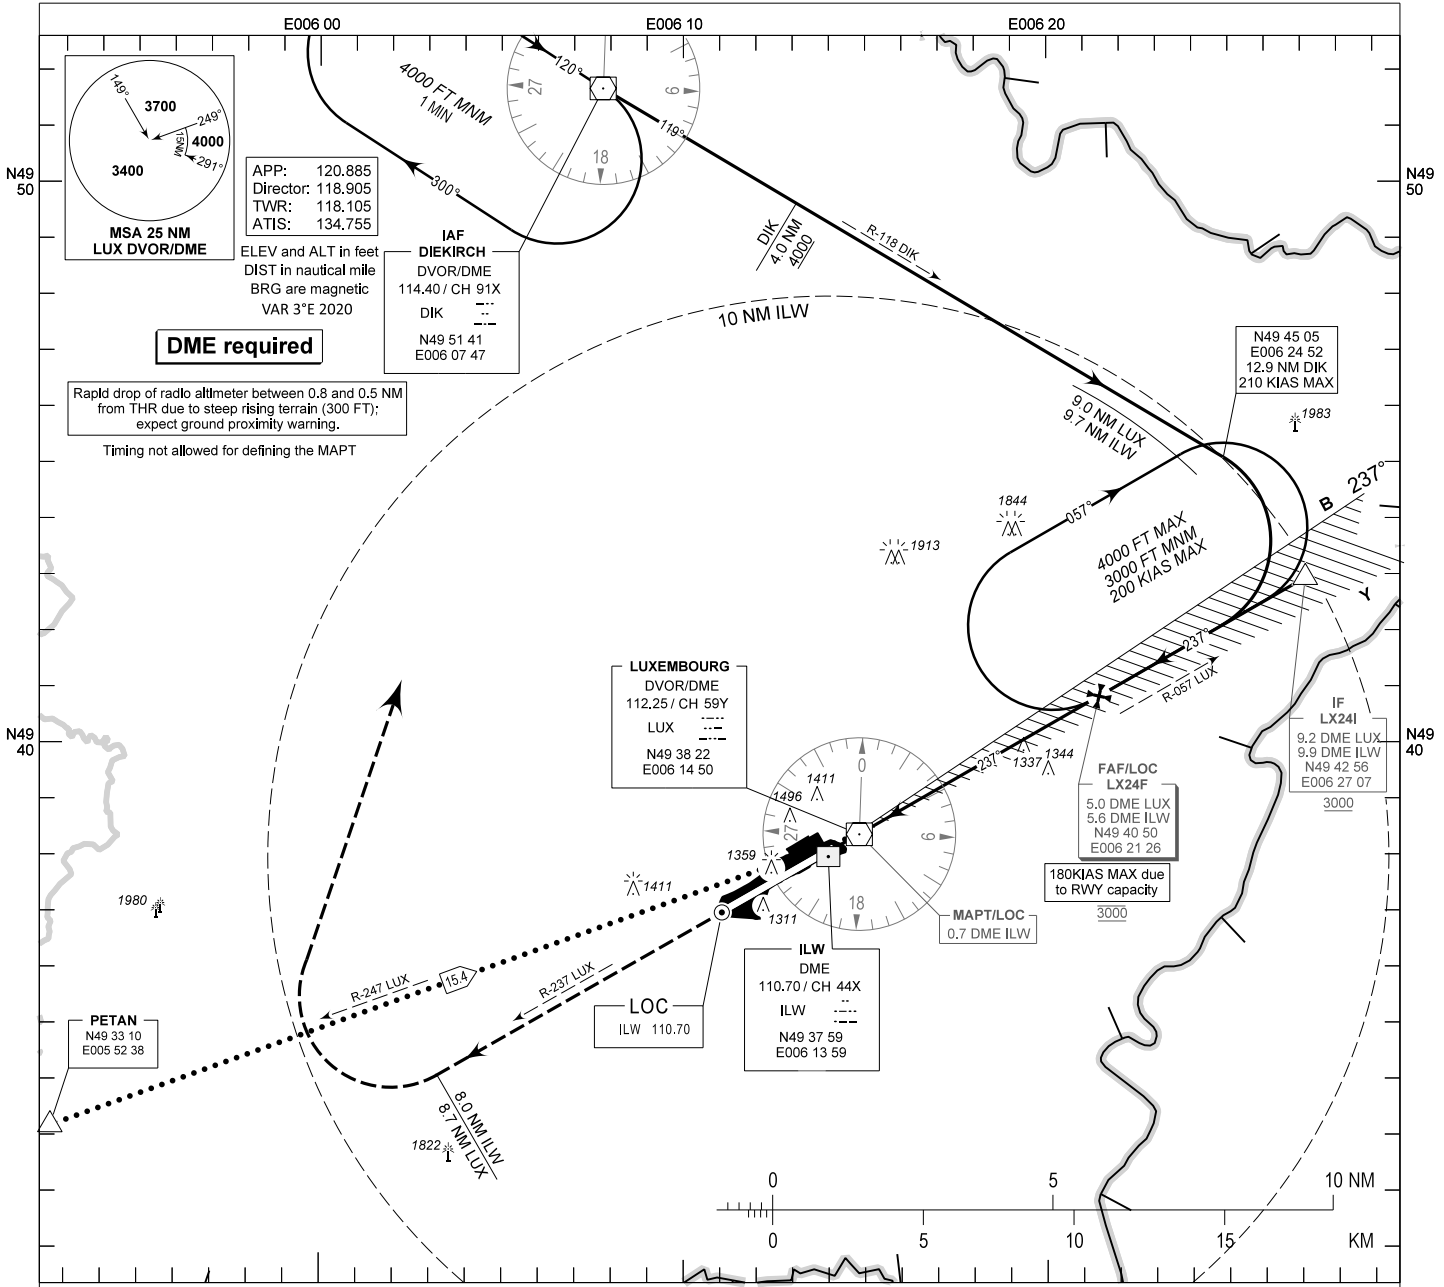

CHANGE: MAG VAR updated

OCA (OCH)						FAF to MAPT - 4.9 NM						
CAT of ACFT	A	B	C	D	DL	Speed (GS)	KT	70	90	120	150	180
ILS CAT I	1413 (200)	1413 (200)	1413 (200)	1414 (201)	1417 (204)	Rate of descent	FT/MIN	375	480	640	800	960
ILS CAT II	1304 (91)	1307 (94)	1315 (102)	1330 (117)	1334 (121)	<b>PROCEDURE ALTITUDES</b>						
LOC	1600 (390)	1600 (390)	1600 (390)	1600 (390)	-							
<b>MINIMA (RVR/VIS)</b>						DIST ILW	5.0	4.0	3.0	2.0		
ILS CAT I	550 M RVR	550 M RVR	550 M RVR	550 M RVR	550 M RVR	Altitude	2810	2490	2170	1850		
ILS CAT II	300 M RVR	300 M RVR	300 M RVR	300 M RVR	300 M RVR							
ILS CAT IIIA	200 M RVR	200 M RVR	200 M RVR	200 M RVR	200 M RVR							
ILS CAT IIIB	125 M RVR	125 M RVR	125 M RVR	125 M RVR	125 M RVR							
LOC	800 M	800 M	800 M	1200 M	1200 M							