
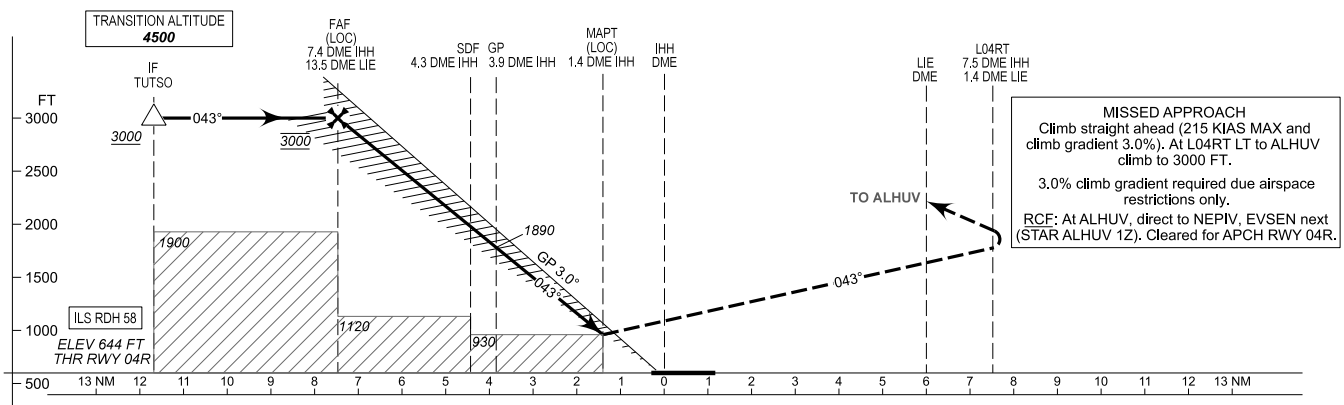


INSTRUMENT APPROACH CHART - ICAO

AD ELEV 651
OCH RELATED TO
THR RWY 04R - ELEV 644

LIÈGE / Liège (EBLG)
ILS CAT II & III or LOC RWY 04R
CAT C-D

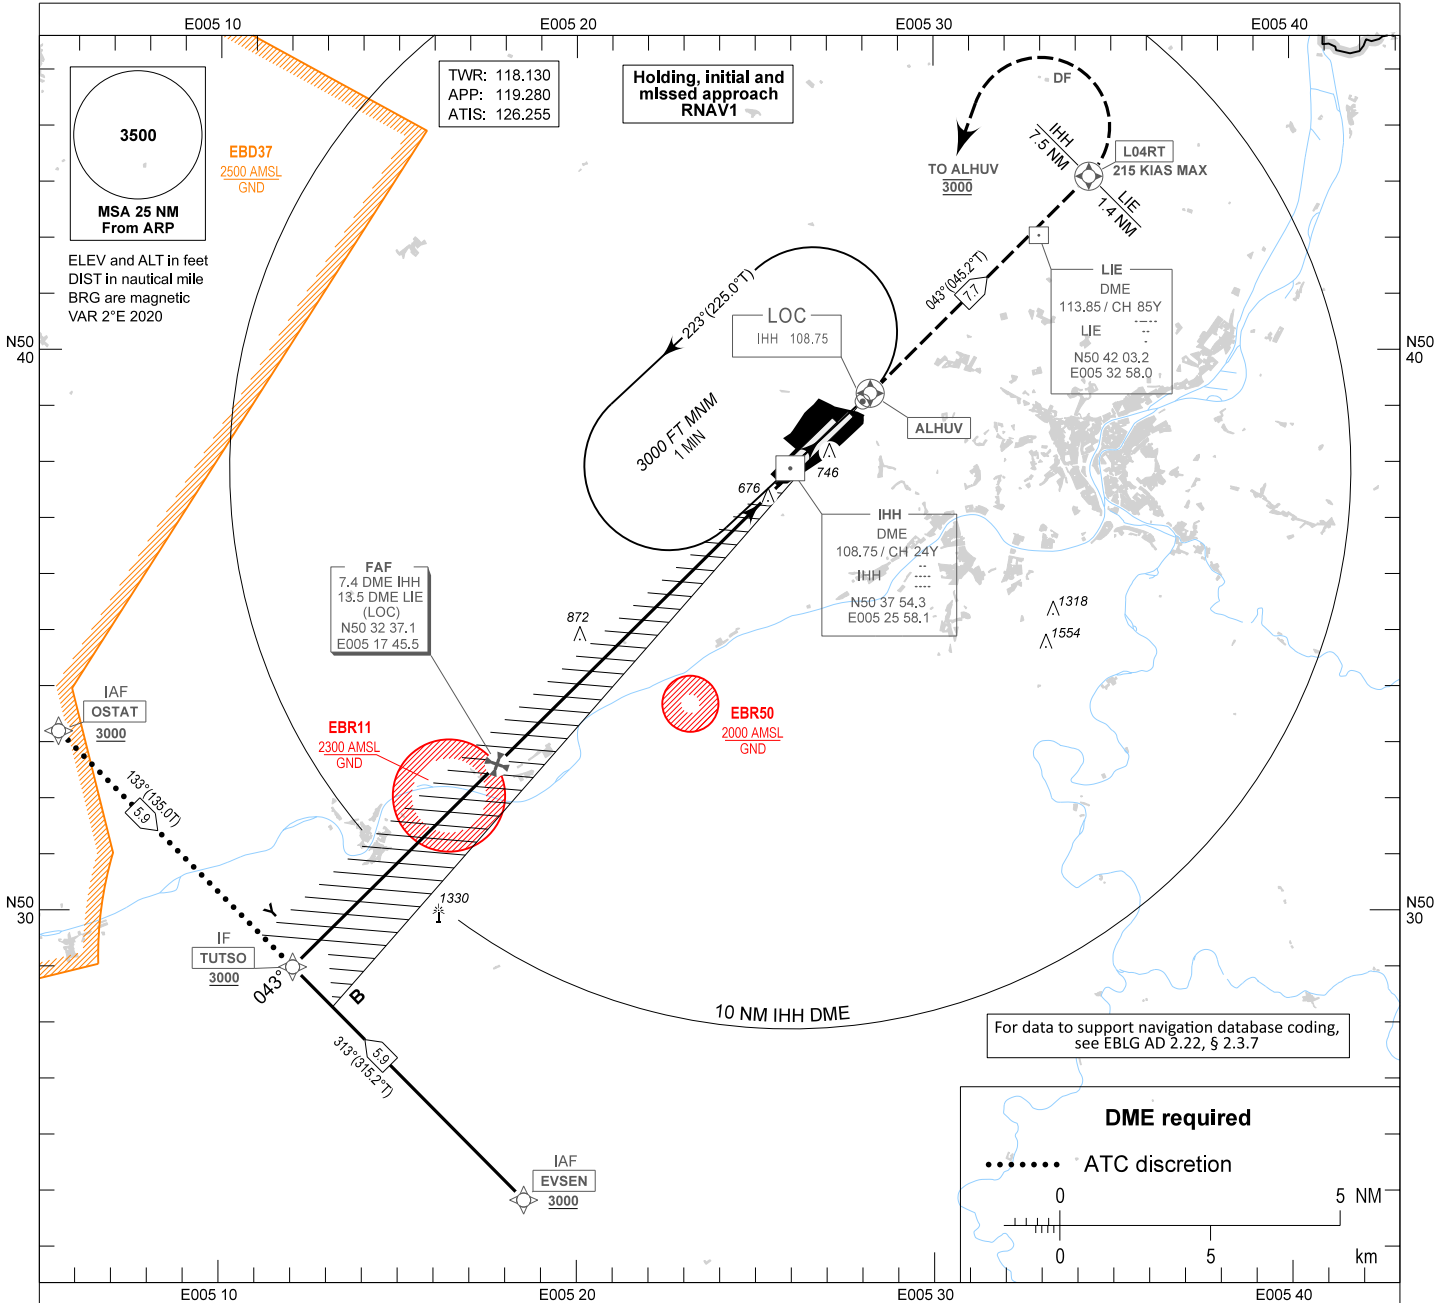

CHANGE: RCF updated

OCA (OCH)					FAF to MAPT - 6.0 NM								
CAT of ACFT		C	D	DL	Speed (GS)	KT	70	90	120	150	180		
ILS CAT I		844 (200)	844 (200)		Rate of descent	FT/MIN	375	480	640	800	960		
ILS CAT II		718 (74)	731 (87)	735 (91)	PROCEDURE ALTITUDES								
LOC only		930 (280)	930 (280)										
LOC only without SDF		1120 (470)	1120 (470)		DME IHH	7.0	6.0	5.0	4.0	3.0	2.0	1.4	
AD OPR MNM: 125 M RVR					Altitude	2860	2540	2230	1910	1590	1270	1080	