


MIPS
MINIMUM VECTORING ALTITUDE

AD ELEV 11

MVA CHART
KOKSIJDE (EBFN)

KOKSIJDE PAR		KOKSIJDE TWR		KOKSIJDE APP		BELGA RADAR	
278.675	123.300	231.800	122.100	235.050	121.055	374.400	129.325

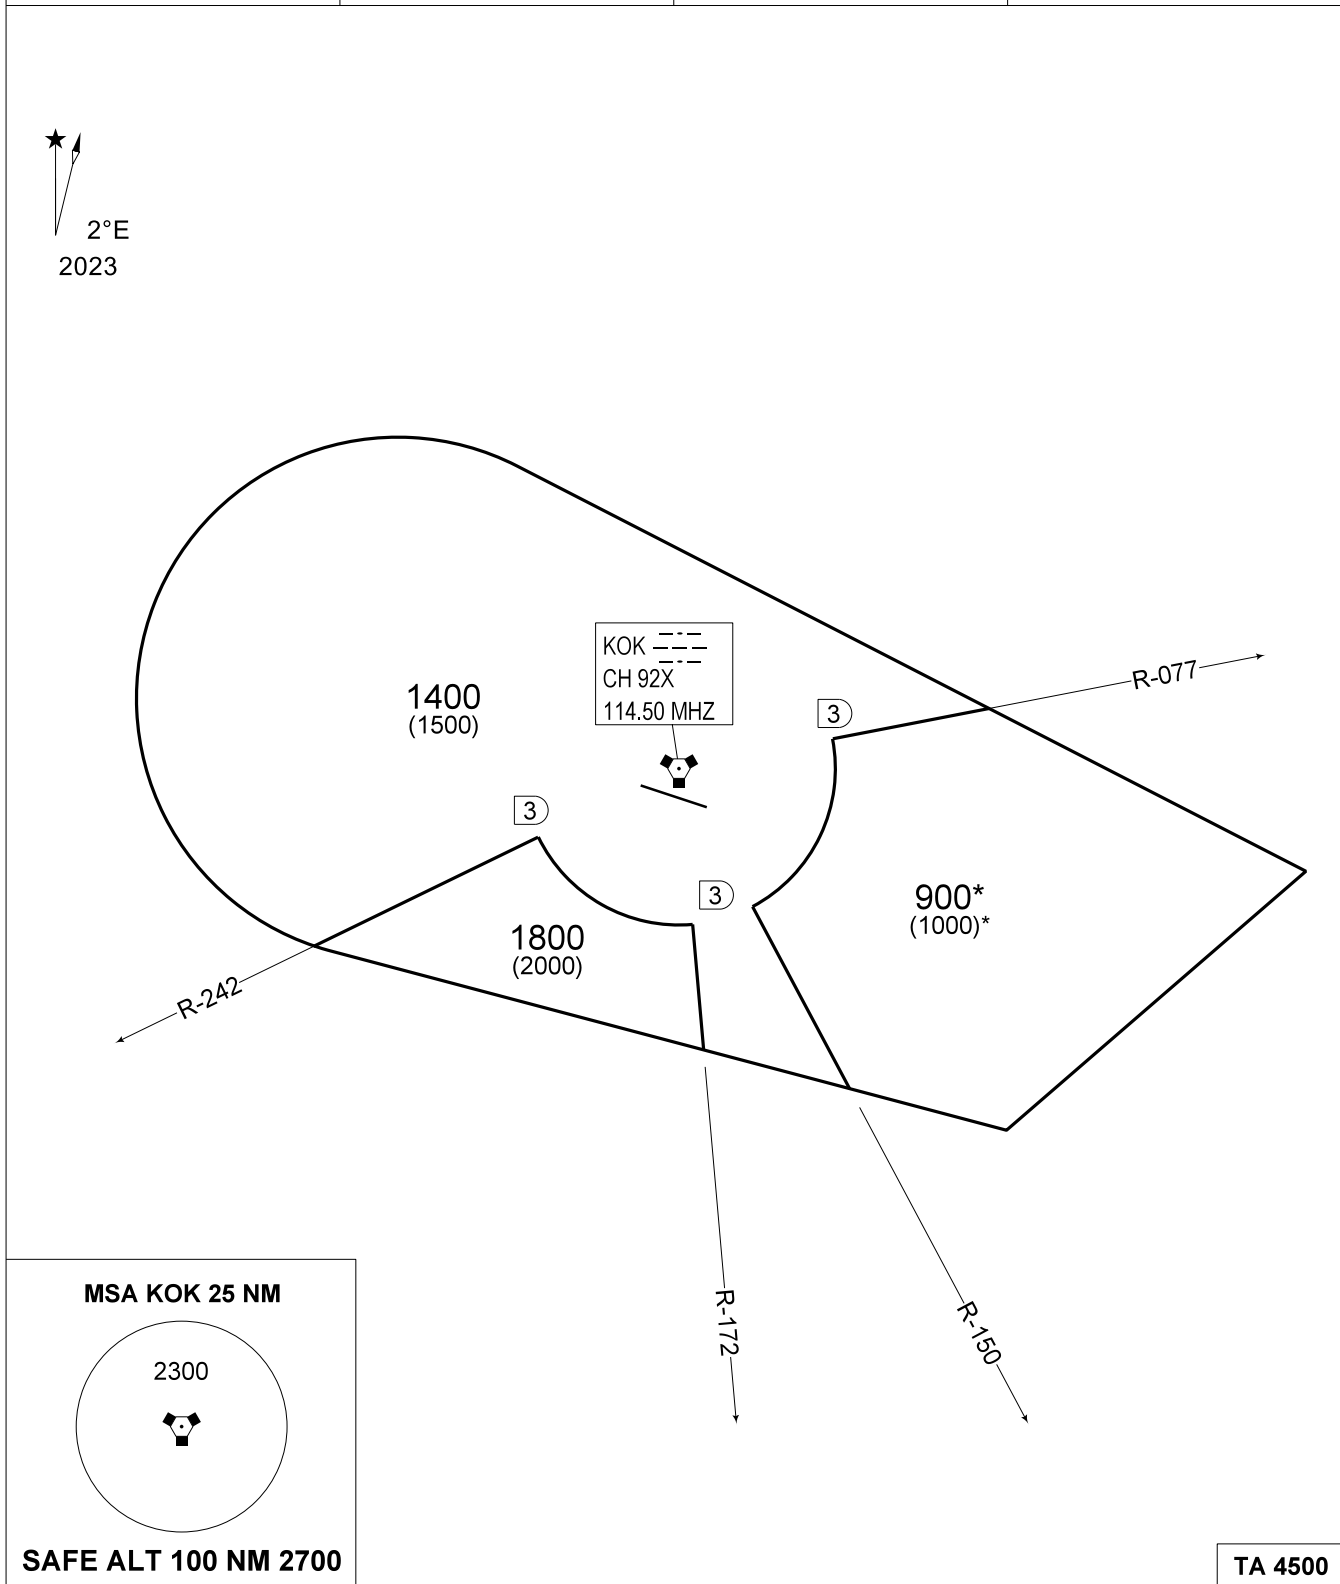

ALTITUDE WITH ASTERISK TO BE USED ONLY UNDER THE FOLLOWING CONDITIONS:
 - THE AIRCRAFT IS VECTORED FOR A STRAIGHT-IN APPROACH ON THE CORRESPONDING RWY
 - THE TRACK OF THE AIRCRAFT IS WITHIN 45° OF THE RWY AXIS
 - THE AIRCRAFT SHALL STRICTLY BE INSIDE THE SECTOR BEFORE DESCENDING

THE ALTITUDE BETWEEN BRACKETS IS TO BE USED FOR THE CORRESPONDING SECTOR WHEN AIR TEMPERATURE AT AIRFIELD ALTITUDE IS LOWER THAN 0°

MVA CHART

51°05.42' N
002°39.17' E

KOKSIJDE (EBFN)